





Microgravity Division
Fluid Physics and Transport Branch



A Preliminary Assessment of Mixing Techniques for Advanced Food Technology



John McQuillen and Nancy Rabel Hall
NASA Glenn Research Center



Microgravity Division

Fluid Physics and Transport Branch



Background

Long duration Mission Requirements

- Transit times to Mars of at least 3 months
- Launch costs are expensive and based on payload mass

Food needs to be

- Safe
- Nutritious
- Appetizing - taste, smell, appearance, consistency

Various trade studies have examined

- Bring prepared food.
- Bring raw ingredients, process and prepare
- Grow raw ingredients, separate key ingredients, continue processing and prepare.
- Various combinations of above

Currently

- All food is prepared and packaged
- May Require Mixing (by kneading or shaking)
- May Require Heating




Purpose of Mixing

Direct:

- Promote dissolution of solids in liquids and liquids in liquids – Need to account for volume changes associated with dissolution!
- Promote chemical reactions
- Promote homogeneity/uniformity of ingredients

Indirect:

- Gas Ingestion & dissolution into ingredients
 - Atypical concern for most space system designers – try to keep the gas out.
 - Dairy industry spends considerable effort to determine best level of “overrun,” i.e., amount of gas bubbles trapped within Ice cream to give best flavor (“lightness” vs “heaviness”) and to increase volume per mass of product.
- Promotes convective heat transfer – Stirring the pot avoids burning the contents




Role of Gravity in Mixing


- Traditional COTS mixers “centrifugally accelerate” or “fling” ingredients towards bowl walls.
 - NASA uses centrifugal accelerations to **separate** not mix phases in reduced gravity
- To a small extent Gravity affects ingredient trajectories
 - Ingredients confine to bowl.
- Gravity also drains ingredients into bowl bottom where it is picked up by mixer and flung again.
 - Drainage rate of ingredients



Experiment Program

- Tests conducted in 2.2 second Drop Tower
 - Most food preparation will occur in a gravity environment, ie Mars (0.375 g's) or the Moon (0.17 g's)
 - Limiting case of $G = 0$ or 10^{-6} .
- Utilized Education Drop Rig
 - Fabricated polycarbonate box to provide secondary fluid containment
 - Utilized COTS mixer and bowl assembly
 - Powered by 2 "C" cells.
 - On/Off function was integrated into Drop Rig's control

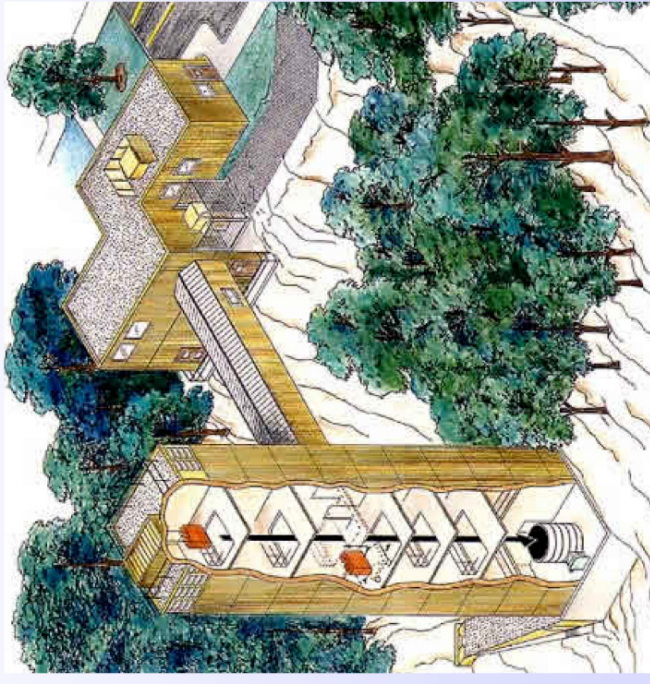




Microgravity Division *Fluid Physics and Transport Branch*




Test Setup



Battery Operated Mixer

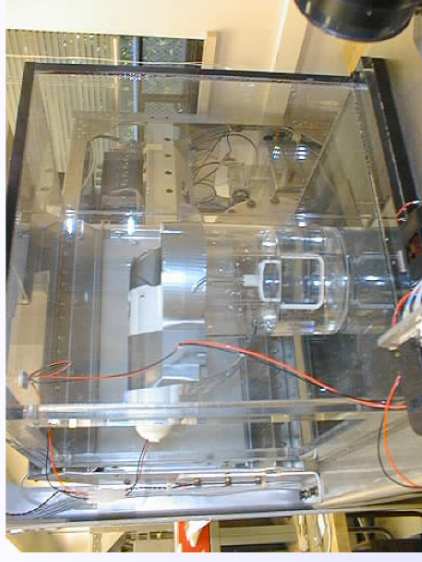

Mixer in Containment Box

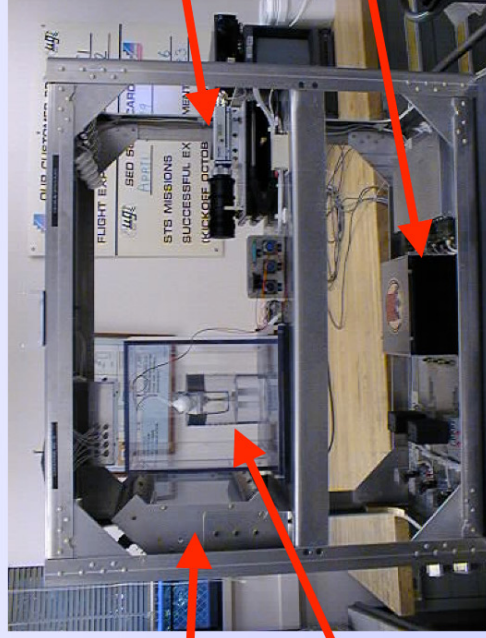

Setup in Education Drop
Tower Rig

Light

Camera

Containment
Box

Battery Box




Microgravity Division
Fluid Physics and Transport Branch




Initial Test Results

Liquid Only

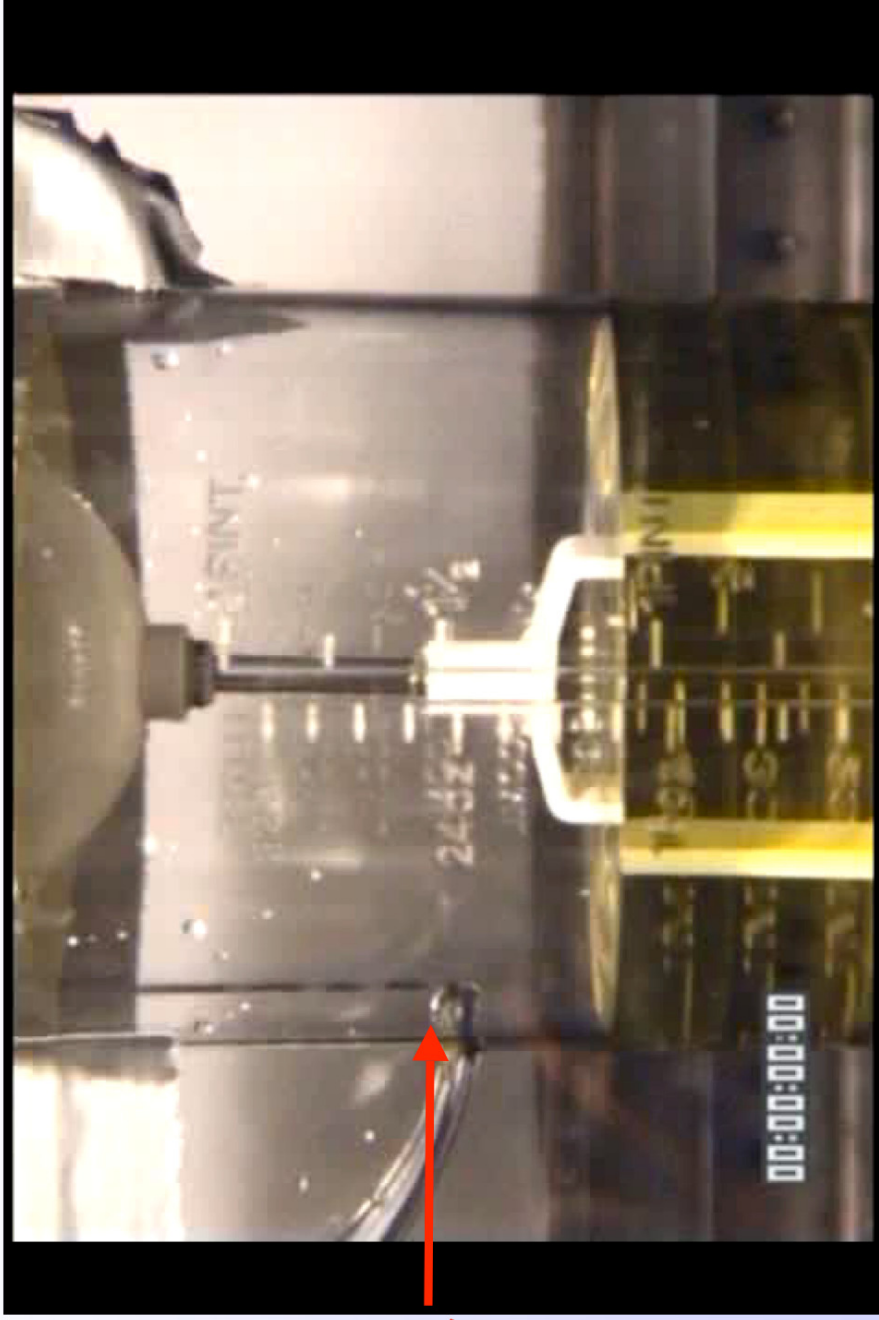

Watch
Corner

Containment and Liquid Recirculation are issues!!!



Microgravity Division
Fluid Physics and Transport Branch



Initial Test Results

Solids Only (3mm Glass Beads)



Containment is THE issue!!!



Microgravity Division
Fluid Physics and Transport Branch




Solids & Liquids

Minimal Liquid – Filled to Just Above Bead



Liquid freezes almost all stirring



Microgravity Division
Fluid Physics and Transport Branch



Solids & Liquids

Minimal Liquid – Filled to Top of Bead Packing



Liquid Reduces Amount of “Splatter”




Microgravity Division
Fluid Physics and Transport Branch



Solids & Liquids

Even MORE Liquid

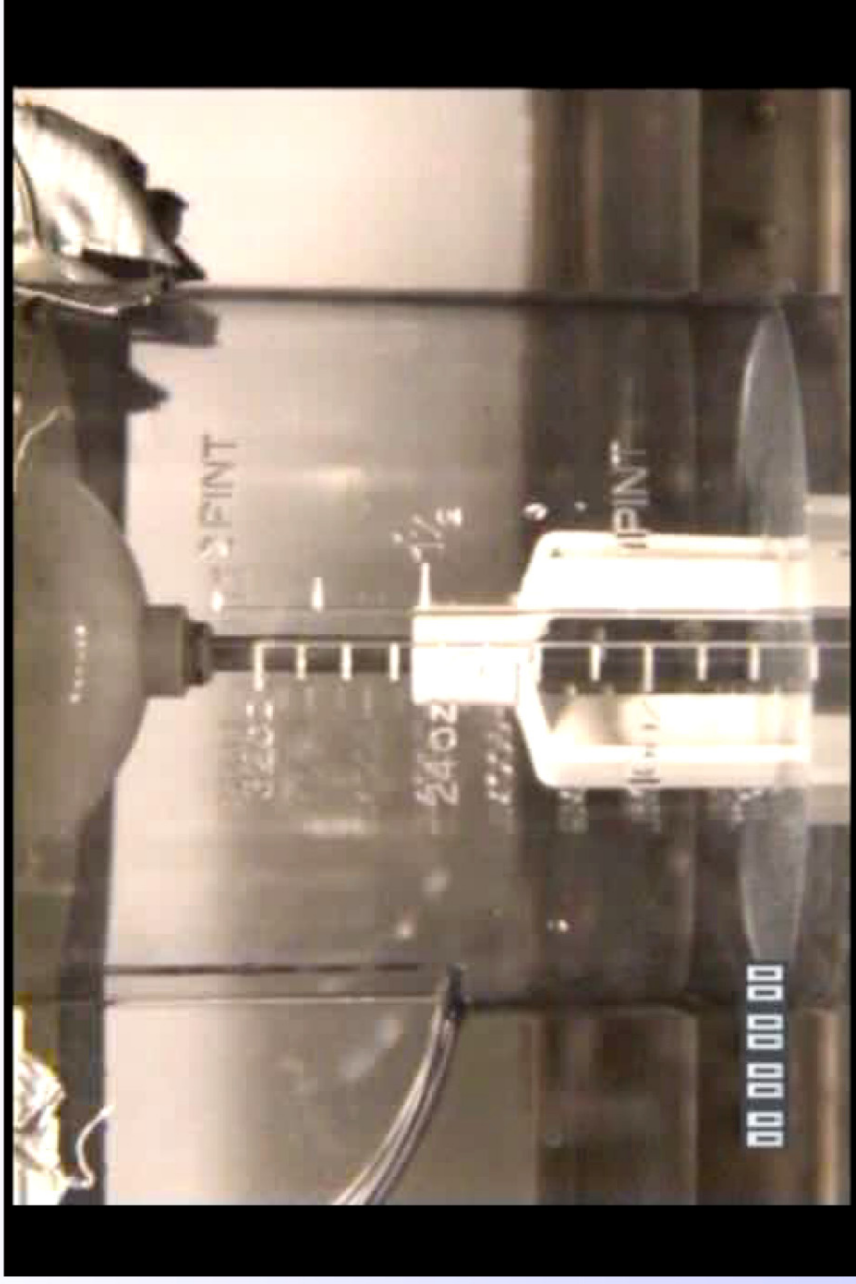





Fluid Containment

- One common technique to limit fluid motion in microgravity within a tank is the use of a “pinning” edge.
- Pinning edges have been effective when fluid motion is perpendicular to edge
- Have never been tried with significant fluid motion that is nearly parallel to edge

Pinning Edge Fabrication

- “Sharp” pinning edges fabricate from acrylic sheets 1.6 mm thick to fit in “tapered” bowl at different locations
- “Rounded pinning edges from Tygon tubing taped into position in bowl

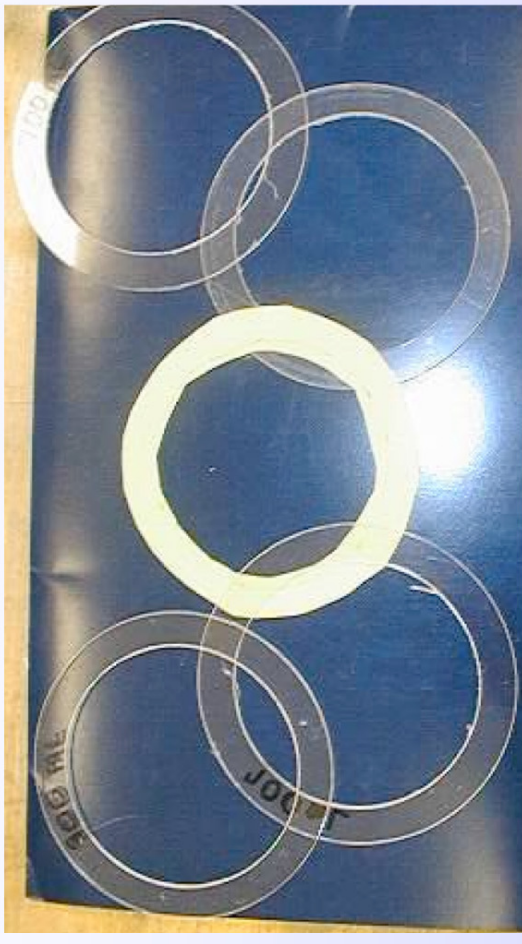



Microgravity Division
Fluid Physics and Transport Branch



Test Results

Significant Distance Between Edge and Fill Level



EUREKA!!!



Microgravity Division
Fluid Physics and Transport Branch



Test Results

Fill Level Close to Edge



Pinning Edge Restrains Liquid BUT
2.2 Seconds is not enough to make final call!!!




Microgravity Division
Fluid Physics and Transport Branch



Test Results

Fill Level At Edge

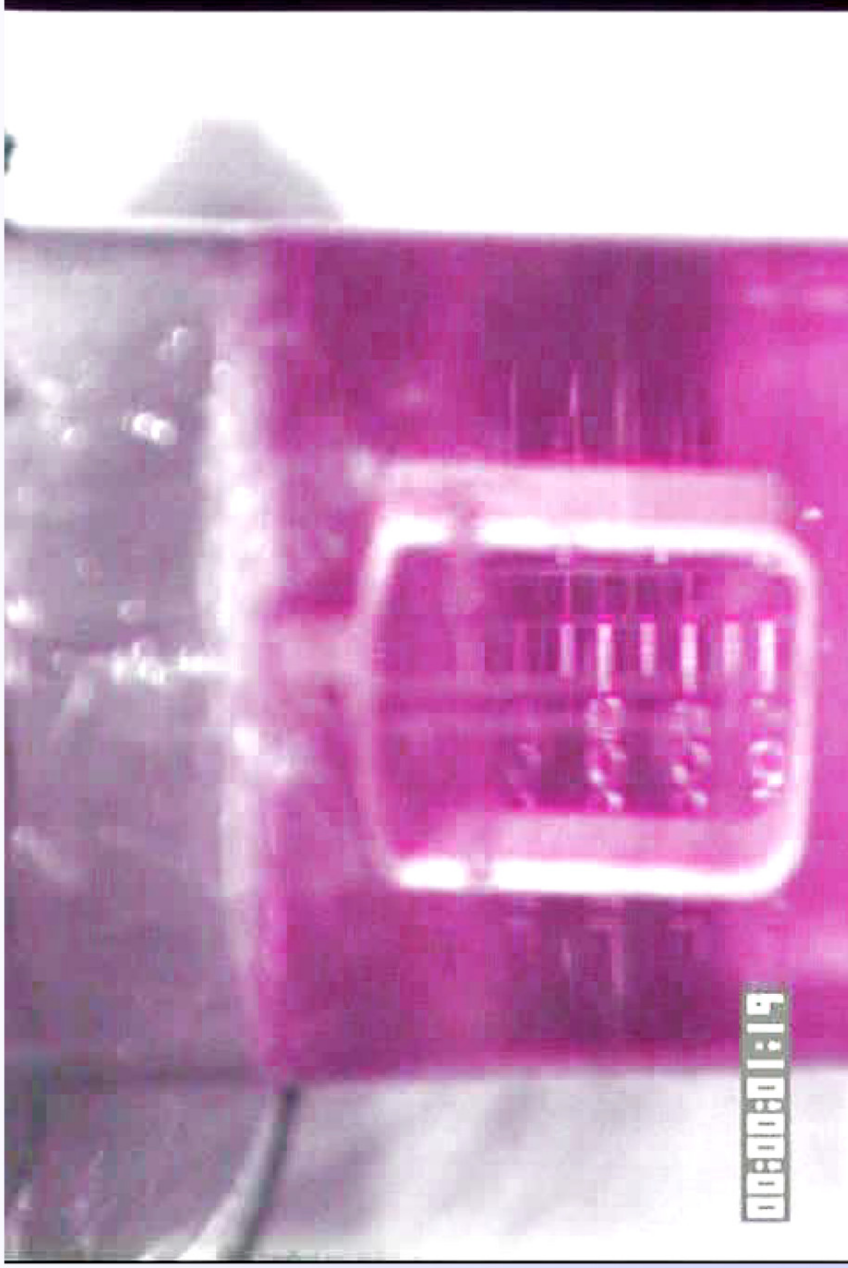

OOPS!!!
Air from above Edge displaces liquid during mixing!!




Microgravity Division
Fluid Physics and Transport Branch




Test Results

Exposed Mixer Blade

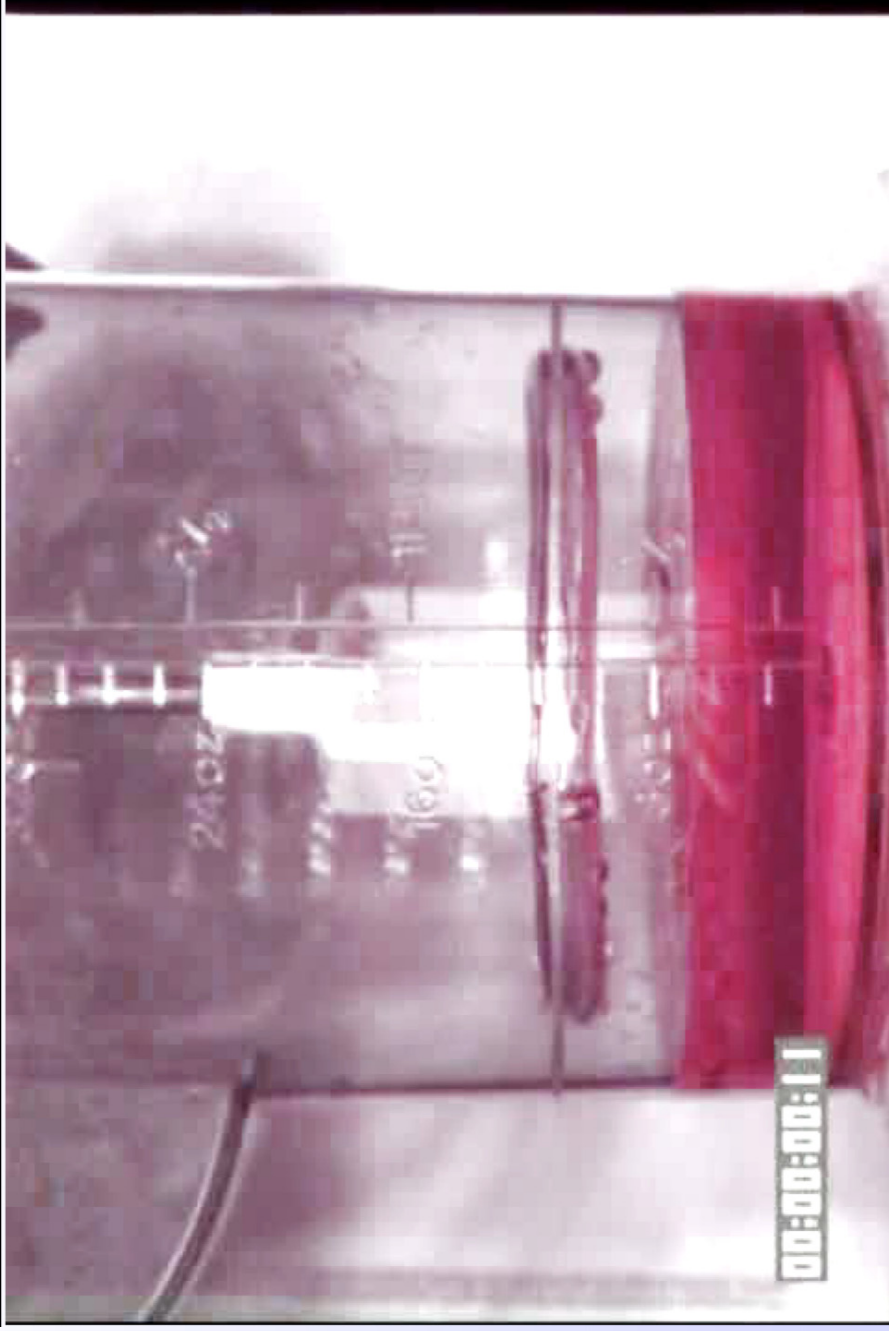

What a Mess!!!



Conclusions

- Some containment of solids appears feasible if they are “wetted down” but this will require a higher “torque” mixer.
- Pinning edges (sharp and round) appear to work provided enough distance is left between pinning edge and fill level.
- “Exposed” mixing vanes above pinning edge contribute to splatter \Rightarrow Use different (paint?) mixer to reduce vane height



Acknowledgements

- NASA Summer High School Apprenticeship Research Program (SHARP) and the following students provided by the program
 - Amanda Sheffield ('04)
 - Charles Huddleston ('04)
 - Monica Okon ('05)
 - Christina Sulkowski ('05)
- NASA 2.2 Second Drop Tower Personnel
 - Eric Baumann
 - Jay Owens
 - Richard DeLombard
 - Lewie Casco
 - Chris Hampton
- Human Systems Research and Technology at NASA Headquarters